

P 产品介绍 Product Introduction

GPT430

17-4PH

F 产品特点 Features

-
-
- 17-4PH
-
-
-
-

A 产品应用 Application

-
-
-
-
-
-
-




S 性能参数 Specifications


(MPa)	0MPa 1MPa...150MPa		
	4 20mA		
	0 5V 0.5-4.5V 0-10V		
	RS485		
	I²C		
FS%	Q1	Q25	Q5
FS%	Q1	Q2	Q4
FS%	Q05	Q05	Q1
%FS/	Q01	Q03	Q05
(%/FS/)	Q1	Q2	Q5
VDC	+12 +30	+24	
	-40 +150		
	-40 +85		
	-40 +125		
	200%/FS 0 60MPa 150%/FS 70 200MPa		
	2 R U-10 /Q02-RD U RD		
	3ms 10% 90%		
	与17-4PH		
	17-4PH		
	304 316L		
	IP65		
	20g @ 10Hz 2000Hz		
	100g/11ms		
	1000		

E 电气连接 Electrical Interface

赫斯曼插座

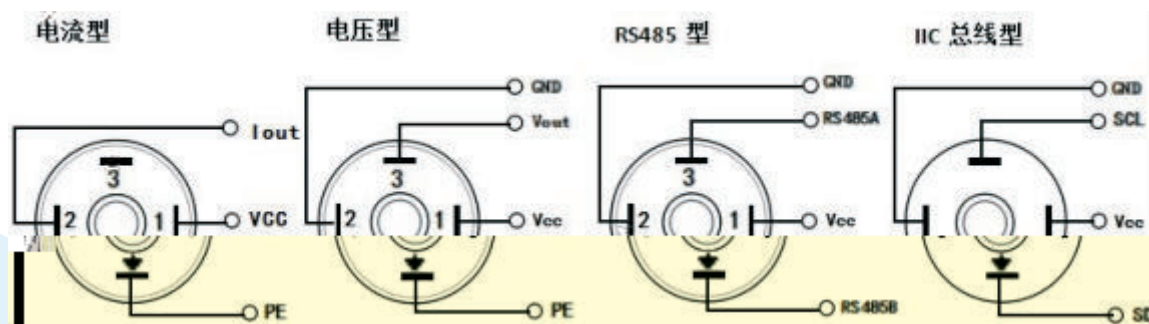

赫斯曼插座

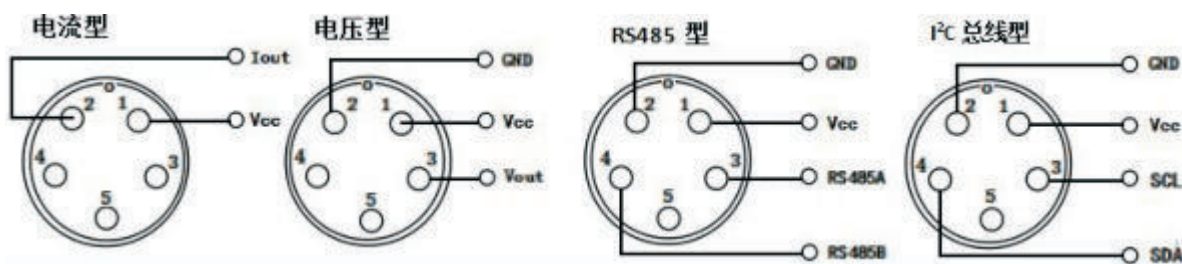

线缆直接出线



D 外形尺寸

Dimension

<p>S-27 L 8 X Φ27</p>		<p>X-55 RS485 X-75</p>
<p>S-26 L 10 X Φ25.4</p>		
<p>S-27 L 10 X Φ27</p>		<p>X-38 RS485 X-68</p>
<p>S-27 L 10 X Φ27</p>		<p>X-69 RS485 X-94</p>

GPT430							
		量程					
OX	0-1...150MPa						
		压力类型					
	G						
	A						
		输出					
	T1	4-20mA					
	T2	0-5VDC					
	T3	0-10VDC					
	T4	RS485					
	T5	I²C					
		供电					
	V1	12-30VDC					
	V2	6-30VDC					
	V3	5VDC					
	V4	3-3.5VDC			T5I²C		
		精度					
	A1	0.1%F.S.					
	A2	0.25%F.S.					
	A3	0.5%F.S.					
		电气连接					
	B1						
	B2						
	B3						
	B4	IP68					
	B5						
		压力接口					
	C1	M20*1.5					
	C2	G1/4					
	C3	G1/2					
	C4	1/4NPT					
	CX	它					
GPT430	0/5MPa	G	T2	V1	A1	B2	C2