

P 产品介绍

product introduction

GPT210

316L

GPT210

()

P 产品特点

product features

- ◆
- ◆
- ◆

A 产品应用

application

- ◆
- ◆
- ◆
- ◆
- ◆

S 技术参数

specification



+




2088

+


项目	参数
	0~0.01...3.5MPa
	±0.5%FS, ±0.25%FS
	4~20mA, 0~5V, 1~5V, 0.5~4.5V, 0~10V, RS485
	5, 12~30VDC

	-10~70
	-20~120 (
	-40~125
	±1%FS/ (), ±1.5%FS/ ()
	±1%FS/ (), ±1.5%FS/ ()
	150%FS
	20g (20-5000HZ)
	100g (11ms)
	±0.2%FS/
	100M , 250VDC
	M20×1.5 G1/2 NPT1/2
	2088
	IP65

D 外形尺寸 (mm) >>>>

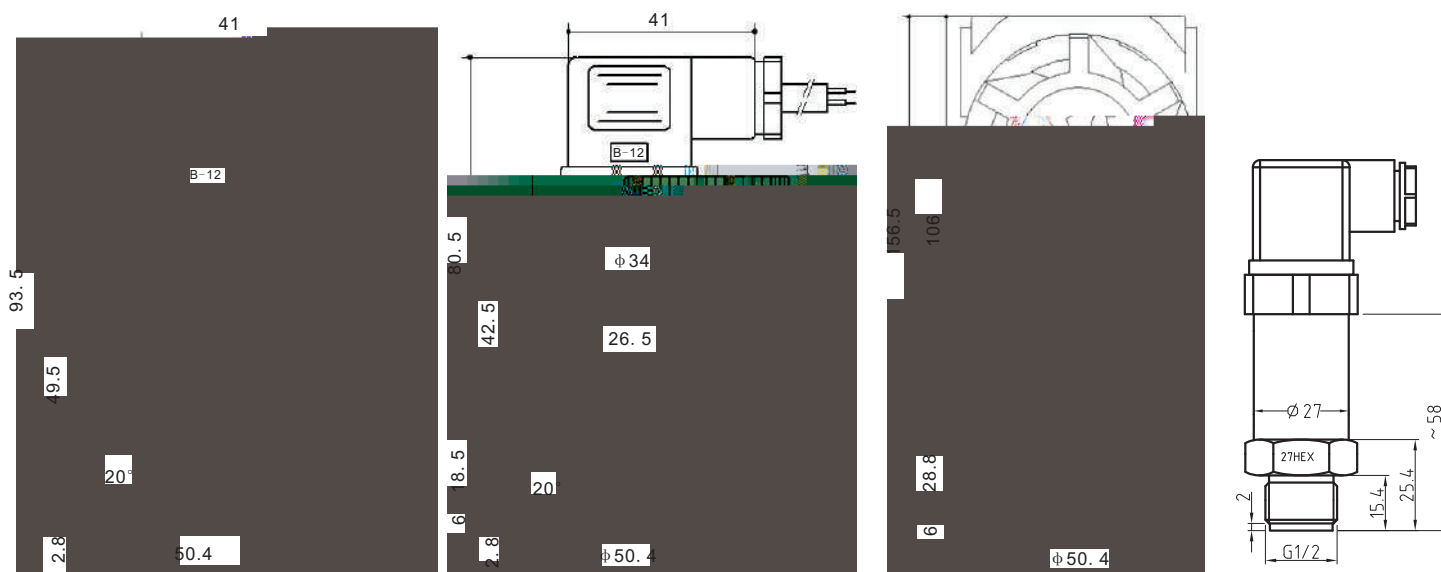

卡箍尺寸

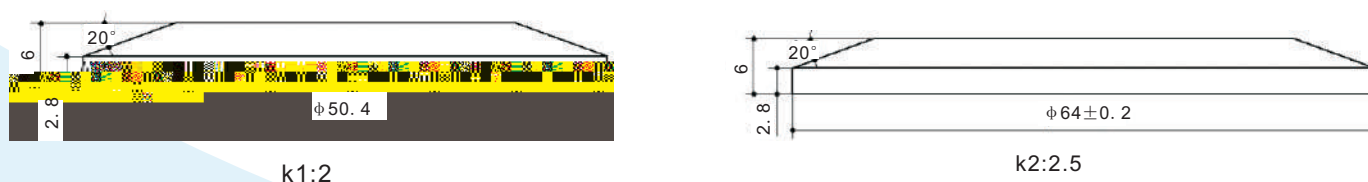

k1:2

k2:2.5

T 产品选型 Type selection

GPT200A GPT200B GPT200C								
2088								
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
	0/X							0~0.01kpa.....3.5Mpa
	G							()
	S							
	A							
	T1							4~20mA
	T2							0~5VDC
	T3							1~5VDC
	T4							0~10VDC
	V1							12VDC
	V2							24VDC
	V3							12~30VDC
	V4							5VDC
	A 1							0.25%FS
	A 2							0.5%FS
	B1							
	B2							
	B3							2088
	B4							
	S1							304 SS
	S2							316L SS
	C1							M20x1.5(male)
	C2							G1/2(male)
	C3							